PO BSM C

POLO Tap Range Polo Bath Shower Mixer



Features:

- Long life 1/4 turn ceramic disc valves for added durability and smooth control.
- Robust metal fixing nut to secure the tap in place reducing the risk of loosening over time.
- A hard-wearing, flawless, scratch resistant chrome finish that lasts for years. Salt spray tested to ensure added durability.
- Rub clean handset limescale and debris build-up is quickly and easily removed by rubbing a finger or a cloth over the nozzles.
- 10 year parts and 1 year labour guarantee for peace of mind.

Product Certifications:



WRAS Certificate No: 2312352 WRAS Expiry Date: 31/12/2028




KIWA Certificate No. 2311735 KIWA Expiry Date: 09/11/2028




Water Label



Specification				
Product Type:	Bathroom Taps			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	3/4" BSP			
Connection Outlet:	M24 Recessed Aerator			
Number of Tap Holes:	2			
Hose Length (mm):	1500			
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5 bar			
Maximum Hot Water Temperature °C:	60°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			



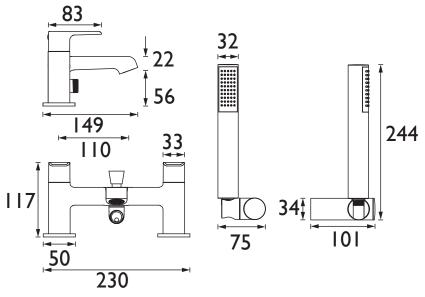

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
Through Bath Filler (mixed)	13.3	22.8	32.6	47.2	57.8	74.6		
Through Handset (mixed)	3.4	5.6	8.6	12.7	16	21		

TECHNICAL DATA SHEET



