QB SHXDIVCTFF C

QUBO Shower Range

Qubo Safe Touch Thermostatic Rigid Riser Diverter Bar Shower Chrome



Features:

- All in one box pack includes bar shower valve, hose, telescopic rigid riser rail and rub-clean anti-limescale drench head and multi function handset so nothing to buy separately.
- Supplied with a fast fit
 Wallmount 12 fixing kit with
 built-in front of wall isolation
 valves on both the hot and cold
 feed, making it simple to fit,
 maintain and replace.
- Safe Touch technology ensures the valve stays cool to the touch while in use.
- Telescopic riser so you can adjust the height to suit your space. Giving you the flexibility to fit in a wet room/walk in shower or over a bath.
- Integral two outlet diverter so you can easily switch between the handset or drench head.

Product Certifications:




♦ 9.8 l/min

For more products, visit our website: http://www.bristan.com



| Specification | | | | | |
|--|--|--|--|--|--|
| Finish/Colour: | Chrome Plated | | | | |
| Main Construction Material: | Brass; Stainless Steel; ABS | | | | |
| No of Controls: | 2 | | | | |
| Shower Type: | Bar Shower | | | | |
| Shower Head Type: | Fixed Head and Multi-Function Handset | | | | |
| Shower Kit: | Telescopic Riser with Fixed Head and Handset | | | | |
| Valve/Cartridge Type: | Thermostatic Cartridge | | | | |
| Maximum Hot Water Supply Temperature °C: | 60 | | | | |
| Plumbing System Suitability: | Suitable for high pressure plumbing systems | | | | |
| Minimum Dynamic Pressure (bar): | 1 | | | | |
| Maximum Dynamic Pressure (bar): | 5 | | | | |
| Maximum Static Pressure (bar): | 10 | | | | |
| Connection Inlet: | 15mm Compression | | | | |
| Connection Outlet: | G1/2" | | | | |
| Isolation Valve Included: | Yes | | | | |
| Check Valve Included: | Yes | | | | |

Dimensions (measurements in mm)

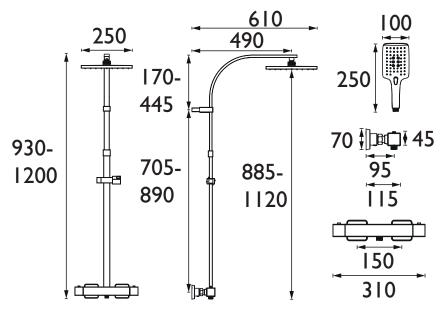

| Flow Rates (I/min) | | | | | | |
|----------------------------|-----|-----|-----|-----|-----|--|
| System Pressure (bar) | 1 | 2 | 3 | 4 | 5 | |
| Through Handset (mixed) | 4.3 | 6.3 | 7.6 | 8.3 | 8.3 | |
| Through Fixed Head (mixed) | 6.1 | 8.6 | 9.8 | 9.9 | 9.4 | |

TECHNICAL DATA SHEET



BRISTAN