## RU SNK EF C

## RUBY Tap Range Ruby Easyfit Mono Sink Mixer Chrome



_			1				
F	$\boldsymbol{\sim}$	-	т	r	$\frown$	c	
	_	വ				$\overline{}$	

- A contemporary single lever kitchen tap featuring Top Fix Easyfit technology.
- Unique patented top fix design, for simple installation from above the sink.
- Simply drop and twist the top fix base into the tap hole from above, and lock into place with the Allen key provided.
- Two supplied isolation valves and flexi tails mean you can connect to the water supply at this point and isolate the base.
- Push the tap on to the base and secure into position with the supplied Easyfit tool and
- Everything you need in the box including an Allen key, isolation valves, Top Fix Easyfit base, Easyfit tool and flexi tails
- Swivel spout for easy use
- Long life ceramic cartridge for added durability and smooth control.
- High quality metal fixings for security and durability
- 10 year parts and 1 year labour guarantee for peace of mind.

## **Product Certifications:**




WRAS Certificate No: 2201900 WRAS Expirty Date: 31/01/2027



**♦**24.2 l/min

Specification						
Product Type:	Kitchen Taps					
Main Construction Material:	Brass					
Mount Type:	Deck Mounted					
Handle Type:	Lever Handle					
Connection Inlet:	1/2" BSP Flexible Tails					
Connection Outlet:	M24 Flow Straightener					
Number of Tap Holes:	1					
Valve/Cartridge Type:	Ceramic Cartridge					
Plumbing System Requirements:	Suitable for all plumbing systems					
Minimum Dynamic Pressure (bar):	0.3 bar					
Maximum Dynamic Pressure (bar):	5.0 bar					
Maximum Hot Water Temperature °C:	65°C					
Maximum Static Pressure (bar):	10 bar					
Flow Type:	Single Flow					
Isolation Included:	Yes					
Minimum Dynamic Pressure (bar):  Maximum Dynamic Pressure (bar):  Maximum Hot Water Temperature °C:  Maximum Static Pressure (bar):  Flow Type:	0.3 bar 5.0 bar 65°C 10 bar Single Flow					

Dimensions (measurements in mm)

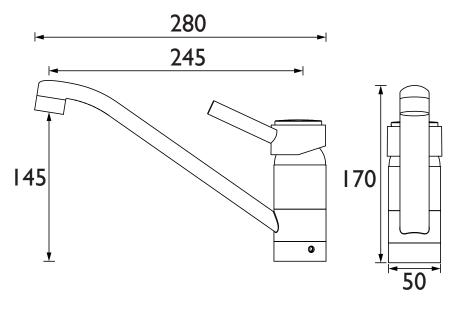

Flow Rates (I/min)									
System Pressure (bar)	0.3	0.5	1	2	3	5			
RU SNK EF C (mixed)	7.6	9.8	13.9	19.7	24.2	31			

## TECHNICAL DATA SHEET



