VAX HNK C

VALUE Tap Range X Head High Neck Pillar Taps Chrome



Features:

- Metal handles
- Metal back nuts for added durability
- Chrome plated to BS EN 248

Specification					
Product Type:	Taps				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Crosshead Handles				
Connection Inlet:	1/2" BSP				
Connection Outlet:	N/A				
Number of Tap Holes:	2				
Valve/Cartridge Type:	1/2" Standard Valve				
Plumbing System Requirements:	Suitable for all plumbing systems				
Minimum Dynamic Pressure (bar):	0.2 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Isolation Included:	No				

Product Certifications:



WRAS Certificate No: 240103001 WRAS Expiry Date: 31/01/2029






For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

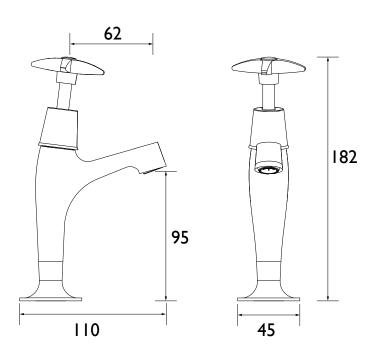

Flow Rates (I/min)								
System Pressure (bar)	0.2	0.5	1	2	3	5		
VAX HNK C (Cold)	13.9	21.9	31	43.8	53.7	69.3		
VAX HNK C (Hot)	13.9	21.9	31	43.8	53.7	69.3		

TECHNICAL DATA SHEET



