RSP EFSNK SS

RASPBERRY Tap Range Raspberry Easyfit Monobloc Sink

Mixer Stainless Steel



Features:

- Unique patented top fix design, for simple installation from above the sink.
- Simply drop and twist the top fix base into the tap hole from above, and lock into place with the Allen key provided.
- Two supplied isolation valves and flexi tails mean you can connect to the water supply at this point and isolate the base.
- Push the tap on to the base and secure into position with the supplied Easyfit tool and screws.
- Everything you need in the box including an Allen key, isolation valves, Top Fix Easyfit base, Easyfit tool and flexi tails
- Swivel spout for easy use
- Long life ceramic cartridge for added durability and ease of use
- High quality metal fixings for security and durability
- Also available in other finishes.
 10 year parts and 1 year labour guarantee for peace of mind.


Product Certifications:



WRAS Cert. Number: 1911936 WRAS Expiry Date: 30/11/2024

Specification				
Product Type:	Kitchen Taps			
Main Construction Material:	Brass			
Mount Type:	Deck Mounted			
Handle Type:	Lever Handle			
Connection Inlet:	1/2" BSP Flexible Tails			
Connection Outlet:	Anti Splash			
Number of Tap Holes:	1			
Maximum Fitting Depth (mm):	35mm			
Valve/Cartridge Type:	35mm Cartridge			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.3 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single Flow			
Isolation Included:	Yes			

Dimensions (measurements in mm)

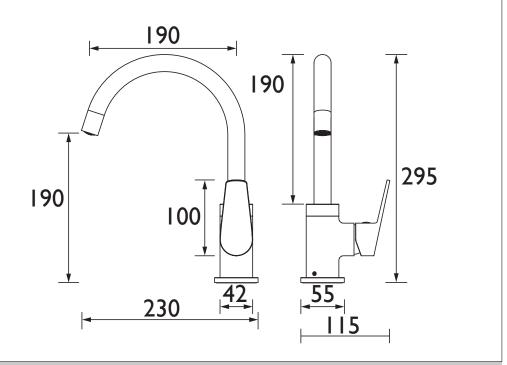

	Flow Rates (l/min)						
Water Label	System Pressure (bar)	0.3	0.5	1	2	3	5
	RSP EFSNK SS (mixed)	6.7	8.8	13.2	19	23.6	30.3
TECHNICAL DATA SHEET	P QUALINA S D D D D D D D D D D D D D D D D D D D		B	RIS	ST/	AN	D4

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

* - 10 year guarantee applies to products purchased on or after 01/04/2021. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.