


## DUNSTON FLEXI SINK MIXER

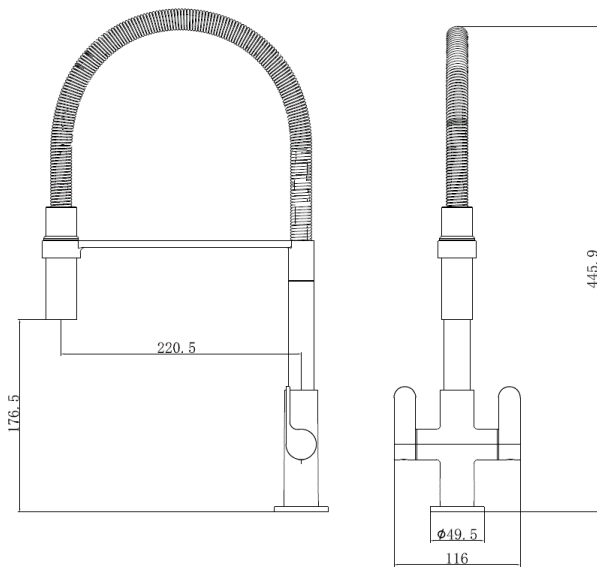

**CONSTRUCTION:** Brass

**CARTRIDGE/VALVE TYPE:** ¼ Turn Ceramic Disc

**SUPPLY:** Suitable For High Pressure Systems

**INLET CONNECTIONS:** ½" BSP

**WORKING PRESSURES:** 0.5 - 5.0 bar

**OPERATION:** Separate Handles For Hot & Cold Control

- On Trend Design Perfectly Complements Contemporary Kitchens
- Pull Down Nozzle Is Ideal For Rinsing Pots And Pans
- Dual Handles Are Fitted With Ceramic Discs For Ease Of Operation
- Optimised To Operate At 6 Litres Per Minute In Order To Save Water
- Chrome Plated Finish
- In Full Colour Packaging

### DUSMCP

### Chrome

#### Open Outlet Flow (Bar - l/min)

BAR	0.1	0.3	0.5	1.0	2.0	3.0	4.0	5.0
<b>SPOUT FLOW</b>	1	2	2.8	4	4.5	4.8	4.9	4.9



2110706



2111360



Please Note: Flow rate will be dictated by installation configurations.  
Please ensure to check the appropriate flow restrictor information if applicable.  
\*Please refer to website for full warranty details.

**FREEPHONE: 0800 195 1602 | FAX ORDERS: 08444 068 690 | EMAIL: SALES@UK.METHVEN.COM**

[methven.com](http://methven.com)

THE INFORMATION ON THIS SPECIFICATION DOCUMENT WAS CORRECT AT THE DATE OF ISSUE. SOME VARIATION MAY OCCUR DUE TO THE MANUFACTURING TOLERANCES AND SITE SPECIFIC CONDITIONS.