

Ceratherm T25 Exposed Thermostatic Bath Shower System

ILLUSTRATED

- A7590** Ceratherm T25 dual exposed thermostatic bath shower mixer pack with idealrain m1 ø200mm round rainshower and m3 shower kit with 3 function ø100mm shower handspray and 1.75m hose
- BD198** Idealrain fast fix connection set for exposed shower valves

ILLUSTRATED PRODUCT DETAILS



Weights

- A7590** 3.90 KG
- BD198** 0.27 KG

Materials

- A7590** Chrome Plated Brass
- BD198** Chrome Plated Brass

Finishes



- A7590**  Chrome (AA)
- BD198**  Chrome (AA)

Flow rates

- A7590** 8 Litres per minute @ 3 bar pressure

Special Notes

Removable 12 litre per minute eco flow regulator fitted in the fixed head and 8 litre per minute regulator in the handspray. Minimum operating pressure of 0.5 Bar

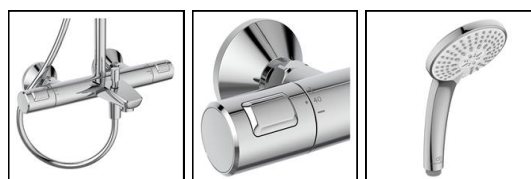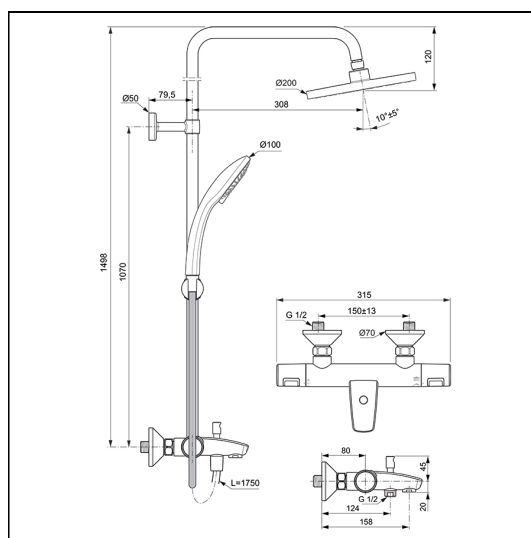

FEATURES

