



Installation Manual for LED Bathroom Mirror

(Suitable for the touch switch and infrared sensor products installation by hanging bar or hardy hold)

Notes: to ensure the normal use of products, it is required set out wires as per the regulations of IEE at the installation places. The products are only applicable to be installed on the indoor. The installation must be executed by a professional electrician, wrong installation may lead to product damage and personal injury.

A / Hanging bar Installation Manual (Instruction for LED bathroom mirror)

① **a (landscape installation method)**

Back of the mirror

b (portrait installation method)

②

Horizontal the hanging bar
mark with a pen in the hanging bar hole

Please choice portrait or landscape installation method first

③

To use the drill to have the holes

④ (A just apply to the solid wall)

Put the expansion plug into the wall hole
both the wall holes and the hanging bar holes are match.
to use the screwdriver to make the screw tightly

⑤

A

B

⑥

To use the drill to have the holes

⑦

Wall

8-9mm

⑧



Power Off

OFF

ON

OFF

Please cut off all the power before the connection

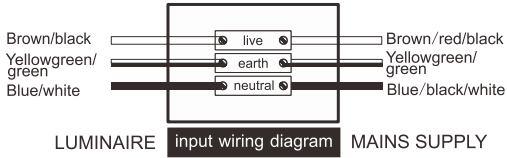


⑨

To connect as per above photo

⑩

Hang up the mirror
 shake left and right to see if it is stable

ON






OFF

⑪


Turn on the power

B / Hardy Holes Installation Manual (Instruction for LED bathroom mirror)

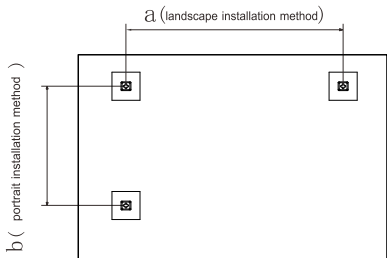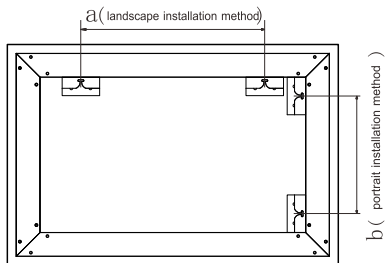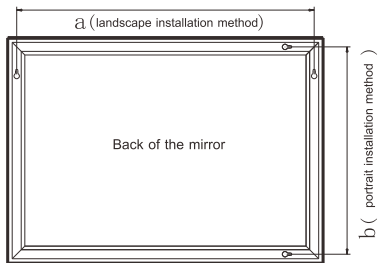


①

please choice portrait or landscape installation method first To use the measure tape to measure to distance between the two holes




②

Horizontal the level ruler
Mark the distance between two holes on the wall with a pen

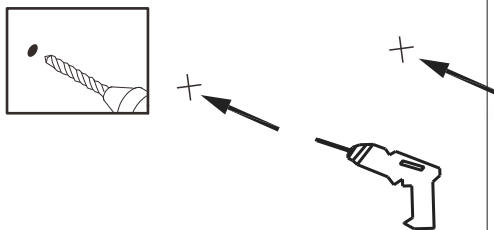


③

To use the drill to have the holes

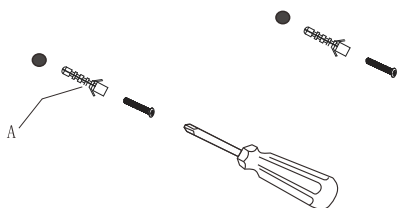


④ (A just apply to the solid wall)

Put the expansion plug into the wall hole
both the wall holes and the hanging bar holes are match.
to use the screwdriver to make the screw tightly

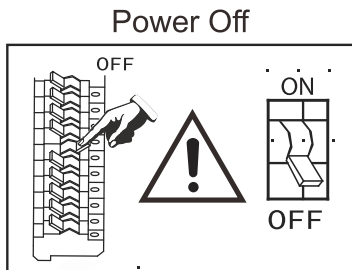


⑤

Please cut off all the power before the connection

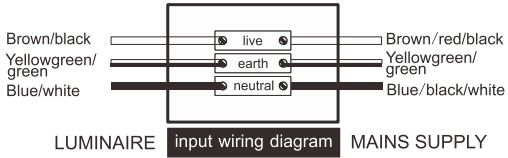


⑥

To connect as per above photo



⑦

Hang up the mirror
shake left and right to see
if it is stable



⑧

Turn on the power

Function usage





“Switch ” sign

- 1、 Please choice below operation according to what product you buy:
 - A、 Touch switch.
 - B、 Touch switch holding to gradually dim.
 - C、 Touch switch press-hold color change.
 - D、 Tap-tap touch color change.
 - E、 The first short touch, turn on the light and demist pad;The second short touch, chang the color temperature;The third short touch, turn off the light and demist pad,when the light be turned on; the first holding touch; the brightness of the light can be changed from 100% to 10% or 10% to 100%,the second holding touch; the brightness of the light can be changed from 10% to 100% or 100% to 10%




Infrared sensor switch




***Please Note**
Products with an Infrared Sensor must be installed with a minimum of 200mm between the sensor and any solid object or reflective surface.


parts list



M4 screw




D6 expansion screw




Aluminum hanging bar

No this spare part if use the hardy holes installation


Installation tools (as shown below)




Flexible rule




Leveling instrument



Churn drill



Screwdriver



Hammer

Warm tips:

- 1、 Please do not use,if the product have any bocken.
- 2、 During operation,never put hard and sharp materials directly against the mirror surface. Otherwise, it may result in current leakage and even personal injury accident.
- 3、 Never forget to turn off the power switch in storm days. Otherwise,lightning may damage electric elements of the product.
- 4、 During normal operation, never forcibly pull out the power plug to stop the product. Otherwise, electric elements of the product may be damaged.
- 5、 Please pull out the power plug if the product is not used for a long time.