


SAGITTARIUS

TAPS & SHOWERING

Construction	Brass Body (CuZn40Pb18); Zinc alloy handle
Finishes	Brushed nickel
Product Type	Contemporary
Water Pressure	Min. 0.2 bar, Max. 6.0 bar
Tested Between Standards	Complies with BS5412, BS EN200
Cartridge	1/4 Turn 1/2" Ceramic disc valves
Aerator Fitting	Spout aerator G1/2" BSP Flexible inlet connection hoses
Guarantee	10 years against manufacturing faults (excluding serviceable parts)
Additional Information	360° Swivel Spout

**CODA LEVER MONOBLOC
SINK MIXER BRUSHED
NICKEL
KTS/235/BN**

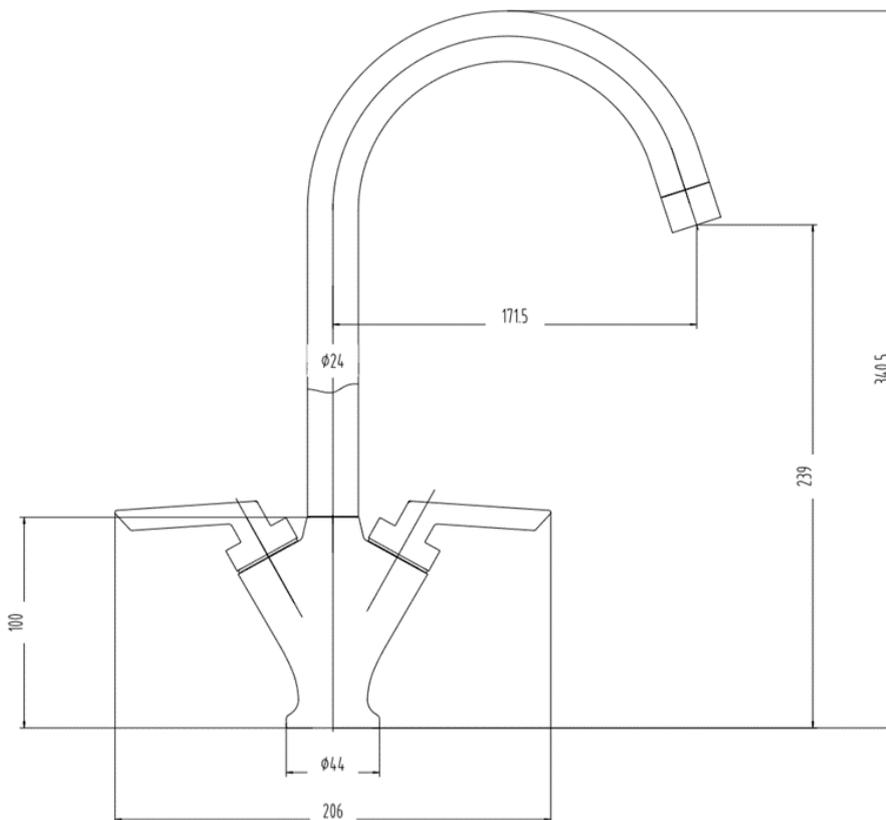

The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice


FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029

EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	2.0	4.4	-	11.5	17.0	21.2	24.6	30.0	-	-

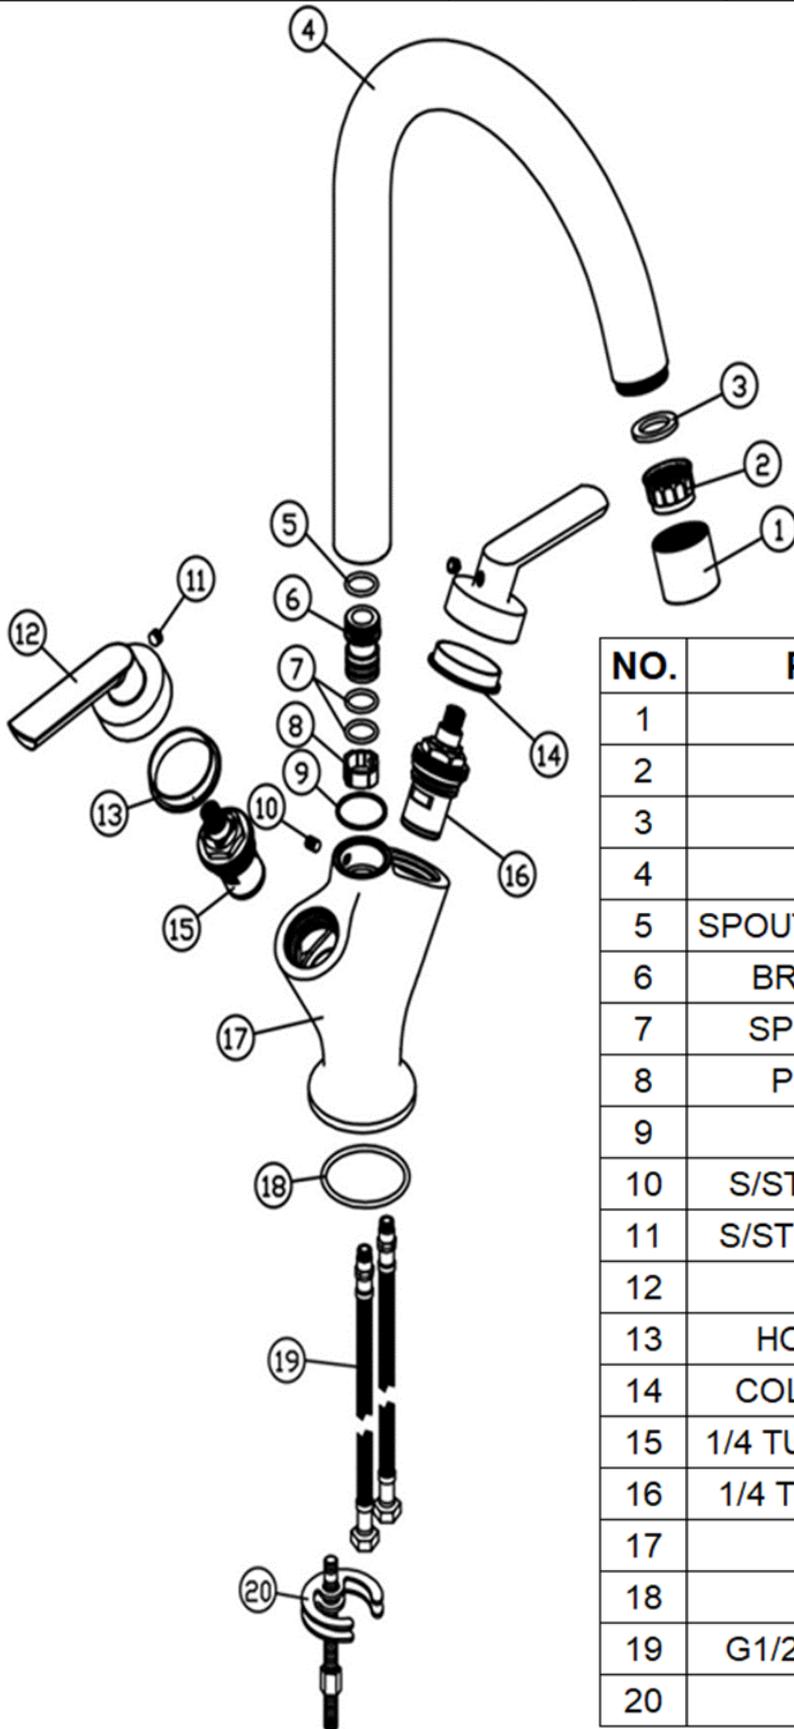

NO.	PARTS DESCRIPTION	QTY
1	AERATOR CASING	1
2	AERATOR	1
3	AERATOR WASHER	1
4	SPOUT	1
5	SPOUT CONNECTOR O-RING (TOP)	1
6	BRASS SPOUT CONNECTOR	1
7	SPOUT CONNECTOR O-RING	2
8	PLASTIC SPOUT WASHER	1
9	SPOUT WASHER	1
10	S/STEEL SPOUT GRUB SCREW	1
11	S/STEEL HANDLE GRUB SCREW	2
12	ZINC-ALLOY HANDLE	2
13	HOT HANDLE RED WASHER	1
14	COLD HANDLE BLUE WASHER	1
15	1/4 TURN G1/2" COLD CARTRIDGE	1
16	1/4 TURN G1/2" HOT CARTRIDGE	1
17	BRASS TAP BODY	1
18	TAP BASE O-RING	1
19	G1/2" BSP S/STEEL FLEXITAILS	2
20	M8 FIXING KIT	1

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029

EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK