SAGITTARIUS

TAPS & SHOWERING

Construction	Brass Body (CuZn38Pb18); Zinc-alloy Handle						
Finishes	Chrome plated to BS EN 248						
Product Type	Contemporary						
Water Pressure	Min. 0.5 bar, Max. 6.0 bar						
Plumbing Sys- tems	Suitable for all plumbing systems, Hot and Cold water pressure preferably balanced Max. supply pressure differential requirement no greater than 5:1						
Standards	Complies with BSEN 1111						
Cartridge	40mm Ceramic disc cartridge						
Fitting	Inlet: Two 15mm Com- pression Con- nection; Outlet: G1/2" Male BSP						
Guarantee	10 years against manufacturing faults (excluding serviceable parts)						
Additional Infor- mation	Adjustable elbow: 135-155mm; Brass wall plate; Exposed/concealed installation						

115

Ø55 150±3

025.6

COMO ADJUSTABLE MANU-AL EXPOSED-CONCEALED SHOWER VALVE CHROME SV/566/C



The information contained on this page was correct at the date of issue. Fitting dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. We pursue a policy of continuing improvement in design and performance of our products and so reserve the right to change specifications without prior notice


22.5

Ø45

31.5


FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

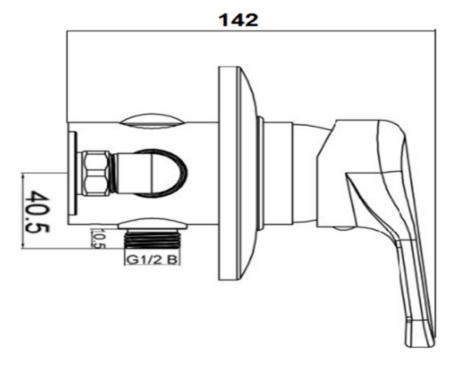

Flow Rates (Litres per minute)

System Pressure	0.1 Bar	0.2 Bar	0.3 Bar	0.5 Bar	1.0 Bar	1.5 Bar	2.0 Bar	3.0 Bar	4.0 Bar	5.0 Bar
	3.7	4.8	5.8	7.3	10.1	12.2	14.2	17.4	20.0	22.3

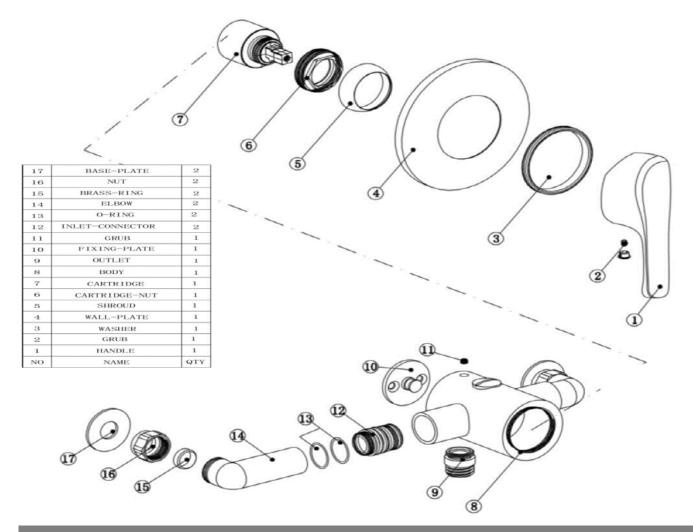

FOR FURTHER ADVICE PLEASE CONTACT :-

SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK

FOR FURTHER ADVICE PLEASE CONTACT :-SAGITTARIUS LTD UNIT 1 LOWER VICTORIA STREET—CHADDERTON—OLDHAM—OL9 9TU TEL:0616 6202029 EMAIL:TECHNICAL@SAGITTARIUSTAPS.CO.UK