


## Geberit Duofix frame for wall-hung WC, 112 cm, with Sigma concealed cistern 12 cm, wall anchoring and connection bend

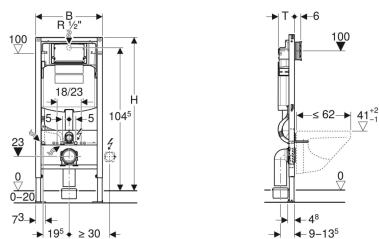

### Application purposes

- For drywall construction
- For installation in part or room-height prewall installations
- For installation in room-height installation walls
- For installation in part or room-height Geberit Duofix system walls
- For wall-hung WCs with connection dimensions in accordance with EN 33:2011
- For wall-hung WCs with projection up to 62 cm
- For floor constructions 0–20 cm

### Characteristics

- Self-supporting frame, powder-coated
- Frame with  $\varnothing$  9 mm drilling holes for fastening in wood frame construction
- Frame prepared for support brackets for WC ceramic appliances with small contact surfaces
- Galvanized feet
- Feet adjustable 0–20 cm
- Non-slip leg supports
- Rotatable foot plates
- Foot plate depth suitable for installation in U-profiles UW 50 and UW75 and Geberit Duofix system rails

- Connection bend can be mounted without tools at different depths, adjustable range 45 mm
- Fastening for connection bend, sound-absorbing
- Concealed cistern with front actuation
- Concealed cistern, fully insulated against condensation
- Cistern fulfils standard requirements in accordance with EN 14055, Class II
- Immediate post flush possible with factory setting
- Tool-free installation and maintenance work on concealed cistern
- Water supply connection on the rear or top centre
- Protection cover box for service opening protects against moisture and dirt
- Protection box for service opening can be cut to length
- With conduit pipe for feed pipe for connection of Geberit AquaClean shower toilets
- Fastening option for electrical connection
- Power & Connect Box mountable

### Technical data

Flow pressure	0.1-10 bar
Maximum operating temperature, water	25 °C
Flush volume, factory setting	5.8 and 3 l
Flush volume small, adjustment range	2-4 l

### Scope of delivery

- Water supply connection Rp 1/2" - R 1/2", compatible with MF, with integrated angle stop valve and hand wheel
- Protection box for service opening
- 2 wall anchors
- Connection set for WC,  $\varnothing$  90 mm
- Connection bend 90° made of PE-HD,  $\varnothing$  90 mm
- Adaptor socket made of PE-HD,  $\varnothing$  90 / 110 mm
- 2 protection plugs
- 2 threaded rods M12
- Fastening material

Art. no.	B	H	T
111.383.00.5	50 cm	112 cm	12 cm

### Accessories

- Geberit set of support brackets for WC ceramic appliances with small contact surfaces
- Fire protection set for Geberit Duofix element for wall-hung WC
- Geberit Duofix set of wall anchors for single installation
- Geberit Duofix set of wall anchors for single and system installation
- Geberit Duofix fastening set for stud clearance 50–57.5 cm
- Geberit Duofix set of foot extensions for floor construction 20–40 cm
- Geberit concealed outlet for drywall and solid wall construction
- Geberit outlet mounting and communication connection box for frame for wall-hung WC




- Any boarding must be fixed tight up against the face of the Duofix frame and screwed directly to the frame
- Flush valve features settings to enable either a 6 l and 3 l flush or a 4.5 l and 3 l flush. Note: must be used with pans designed for low volume flush
- The cistern can be operated with used water (rainwater) provided it is passed through a filter system first

**Geberit Smyle Square wall-hung WC, washdown, shrouded, Rimfree**



Example image

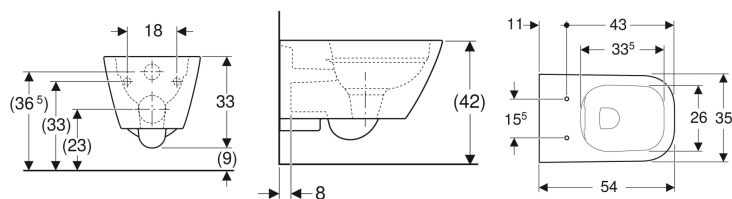

**Application purposes**

- For concealed cisterns
- For pressure flushing valves

**Characteristics**

- Wall-hung
- Washdown WC
- Rimfree

- Easy fastening with Geberit WC wall fixing type EFF3
- Type 1, full flush volume 6 / 5 l, in accordance with EN 997
- Flushes with 4.5 l
- Shrouded
- Hidden fastening

**Technical data**

Product material | Vitreous china

**Scope of delivery**

- Fastening material

**To order additionally**

- WC seat

Art. no.	Colour / surface	B	H	T
500.208.01.1	white	35 cm	33 cm	54 cm

**Accessories**

- Geberit fastening material for wall-hung WCs and wall-hung bidets
- Geberit straight connector set for WC




- Depending on the installation type, a Geberit connection set for wall-hung WC is required for mounting

**Geberit Smyle Square WC seat, slim design**



Example image

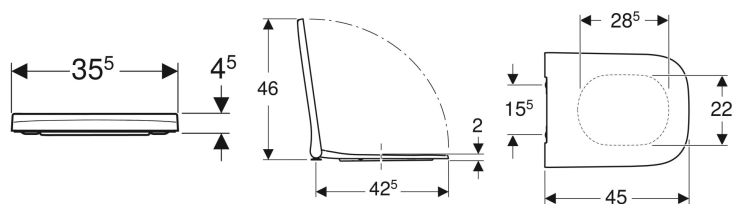

**Characteristics**


- Antibacterial
- Slim design
- Overlapping WC lid

**Technical data**

Product material	Duroplast
Fastening distance	15.5 cm

Art. no.	Colour / surface	Quick-release hinges	Soft-closing mechanism	Fastening	Hinge material
500.687.01.1	white / glossy	yes	yes	from above	Brass chrome-plated
500.237.01.1	white / glossy	no	yes	from above	Brass chrome-plated
500.238.01.1	white / glossy	no	no	from above	Brass chrome-plated

## Geberit Sigma01 flush plate for dual flush

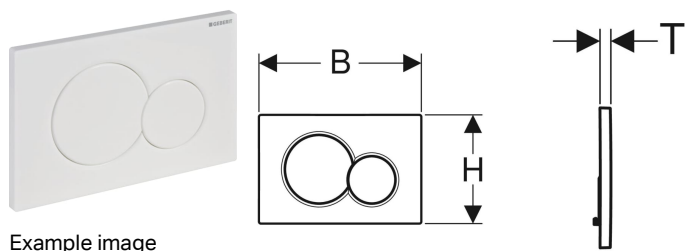

Example image

### Application purposes

- For flush actuation with Sigma concealed cisterns

### Characteristics

- Front actuation

### Scope of delivery

- Mounting frame
- 2 distance bolts

- Sound-absorbing actuator rods, tool-free fast adjustment

### Technical data

Actuation force | < 20 N

- 2 actuator rods

Art. no.	Colour / surface	Material designation	B	H	T
115.770.11.5	white	Plastic	24.6 cm	16.4 cm	1.3 cm
115.770.21.5	gloss chrome-plated	Plastic	24.6 cm	16.4 cm	1.3 cm
115.770.DT.5	fine brass galvanized	Plastic	24.6 cm	16.4 cm	1.3 cm
115.770.DW.5	black	Plastic	24.6 cm	16.4 cm	1.3 cm
115.770.KA.5	Plate: gloss chrome-plated Buttons: matt chrome-plated	Plastic	24.6 cm	16.4 cm	1.3 cm
115.770.LA.5	Plate: white Full flush volume button: yellow Partial flush volume button: green	Plastic	24.6 cm	16.4 cm	1.3 cm
115.770.LB.5	Plate: white Full flush volume button: blue Partial flush volume button: red	Plastic	24.6 cm	16.4 cm	1.3 cm
115.770.JQ.5	matt chrome / easy-to-clean coated	Plastic	24.6 cm	16.4 cm	1.3 cm

### Accessories

- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with automatic actuation and insert for Geberit DuoFresh stick, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with manual actuation and insert for Geberit DuoFresh stick, for Sigma concealed cistern 12 cm
- Geberit DuoFresh module with automatic actuation, for Sigma concealed cistern 8 cm
- Geberit DuoFresh module with automatic actuation and insert for Geberit DuoFresh stick, for Sigma concealed cistern 8 cm
- Geberit DuoFresh module with manual actuation, for Sigma concealed cistern 8 cm
- Geberit DuoFresh module with manual actuation and insert for Geberit DuoFresh stick, for Sigma concealed cistern 8 cm
- Insert for Geberit DuoFresh stick, for Sigma concealed cistern 12 cm
- Insert for Geberit DuoFresh stick, for Sigma concealed cistern 8 cm
- Geberit extension set for Sigma, Omega and Kappa concealed cisterns