PS2 BSM C

PISA Tap Range Pisa 2 Bath Shower Mixer Chrome



_			
-	\sim ti	Irac'	

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.75m hose, rub-clean anti-limescale handset and wall bracket

Specification					
Product Type:	Bathroom Taps				
Main Construction Material:	Brass				
Mount Type:	Deck				
Handle Type:	Square				
Connection Inlet:	3/4" BSP				
Connection Outlet:	G 1/2"				
Number of Tap Holes:	2				
Valve/Cartridge Type:	3/4" Ceramic Disc Valve - 1/4 turn				
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced				
Minimum Dynamic Pressure (bar):	0.3 bar				
Maximum Dynamic Pressure (bar):	5 bar				
Maximum Hot Water Temperature °C:	65°C				
Maximum Static Pressure (bar):	10 bar				
Flow Type:	Single				
Isolation Included:	No				

Product Certifications:



WRAS Certificate No: 2212702 WRAS Expiry Date: 31/12/2027






For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

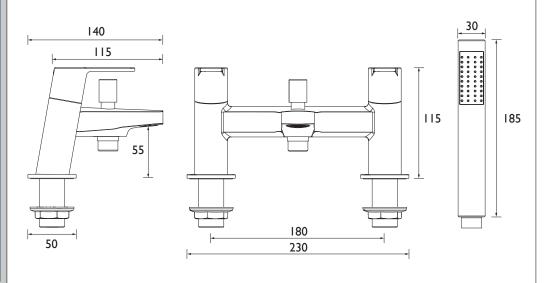

Flow Rates (I/min)										
System Pressure (bar)	0.3	0.5	1	2	3	5				
Through Bath Filler (mixed)	18.3	23.7	33.5	47.4	58	74.9				
Through Handset (mixed)	4.7	6.1	8.7	12.2	15	19.4				

TECHNICAL DATA SHEET



