JAVA Tap Range Java Bath Shower Mixer Chrome



Maill Collstruction Material.	Diass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	3/4" BSP			
Connection Outlet:	G 1/2"			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems, ideally balanced			
Minimum Dynamic Pressure (bar):	0.2 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			

Specification

Bathroom Taps

Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.5m hose, rub-clean anti-limescale handset and wall bracket
- Single-function rub-clean antilimescale handset and wall bracket
- 1.5m shower hose

Product Certifications:



WRAS Certificate No: 2210706 WRAS Expiry Date: |30/09/2027





For more products, visit our website: http://www.bristan.com




Dimensions (measurements in mm)

10 bar

Single

No

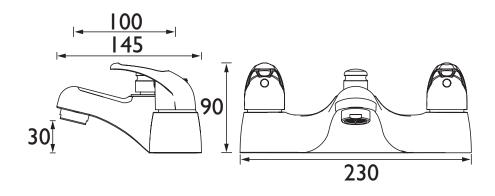

Flow Rates (I/min)							
System Pressure (bar)	0.2	0.5	1	2	3	5	
Through Bath Filler (mixed)	17.6	27.8	39.3	55.5	68	87.8	
Through Handset (mixed)	7	11.1	15.7	22.2	27.2	35.1	

TECHNICAL DATA SHEET



Product Type:

Main Construction Material:

Maximum Static Pressure (bar):

Flow Type:

Isolation Included:

