CRZ SHXDIVCTFF BLK

CRAZE Shower Range Craze Adjustable Rigid Riser Diverter

Bar Shower Black



Features:

- You really can count on Bristan showers as they are designed, engineered and tested to last with our easy fit installation and family safe features plus a modern black finish, all under a 5 Year guarantee for peace of mind
- A black finish that will make a statement in any bathroom
- Supplied with our wallmount 12 fixing kit. The simplest solution for installing, maintaining and replacing bar mixer showers, using built in front-of-wall isolation valves and 15mm inlet connections
- Dual control Flow and temperature are controlled separately giving accurate control of both
- Thermostatic cartridge with preset temperature stop at 38°C to eliminate the ability to select an unsafe temperature and can be adjusted up to a maximum of 43°C

Product Certifications:



WRAS Certificate No: 220990


WRAS Expiry Date: 30/09/2027





12.7

Specification					
Finish/Colour:	Black				
Main Construction Material:	Brass, Stainless Steel, ABS				
No of Controls:	2				
Shower Type:	Bar Shower				
Shower Head Type:	Fixed Head & Single Function Handset				
Shower Kit:	Telescopic Riser with Fixed Head				
Valve/Cartridge Type:	Thermostatic Cartridge				
Maximum Hot Water Supply Temperature ^o C:	60				
Plumbing System Suitability:	Suitable for high pressure systems				
Minimum Dynamic Pressure (bar):	1.0				
Maximum Dynamic Pressure (bar):	5.0				
Maximum Static Pressure (bar):	10				
Connection Inlet:	15mm Compression				
Connection Outlet:	G1/2" and Riser Outlet				
Isolation Valve Included:	Yes				
Check Valve Included:	Yes				

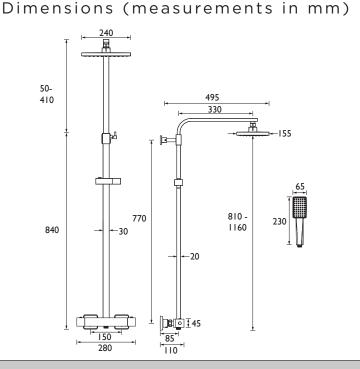

2209901	C		-				
/09/2027	Flow Rates (l/min)						
	System Pressure (bar)	1	2	3	4	5	
l/min	Through Handset (mixed)	5.8	8.7	10.8	12.7	14.3	
	Through Fixed Head (mixed)	6	9.3	11.7	13.7	15.2	



BRISTAN

D5

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com. * - Non-chrome product finishes carry a 3 year guarantee on finish. See www.bristan.com/guarantees for more information. The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuous improvement in design and performance of its products and so reserves the right to change specifications without prior notice.