


Geberit urinal flush control with pneumatic flush actuation, Type 30 flush plate

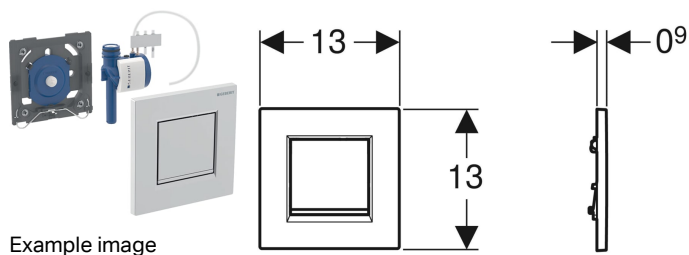

Application purposes

- For manual flush actuation of urinals
- For Geberit frames for urinal with front actuation
- For installation in installation sets for Geberit urinal flush controls (from year of manufacture 2009)

Characteristics

- Flush plate with securing bar
- Flush time setting with air nozzles (pneumatic)
- Low flush actuation force
- Short stroke movement
- Flush actuation when the actuator button is released
- Flush volume can be reduced to 0.5 l per flush with regulating screw of installation set

Technical data

Flow pressure	1–8 bar
Test pressure, water max.	16 bar
Test pressure, air / inert gas max.	3 bar
Operating temperature, water max.	30 °C
Actuation force max.	12 N
Flow rate at 1 bar without flow limiter	0.3 l/s
Flow rate at 1 bar with flow limiter	0.18 l/s
Calculated flow rate	0.22 l/s
Relative humidity	≤ 100 %
Minimum flow pressure for calculated flow rate	1 bar
Flush time, adjustment range	4 / 8 / 12 s

Scope of delivery

- Type 30 flush plate
- Pneumatic flush actuation, premounted on mounting frame
- Pneumatic valve
- Fastening material

Art. no.	Colour / surface	Material designation
116.017.KH.1	Plate and button: gloss chrome-plated Design stripes: matt chrome-plated	Plastic
116.017.KJ.1	Plate and button: white Design stripes: gloss chrome-plated	Plastic
116.017.KK.1	Plate and button: white Design stripes: gold-plated	Plastic
116.017.KM.1	Plate: high-gloss / black Design stripes: gloss chrome-plated	Plastic
116.017.16.1	Plate and button: black matt coated, easy-to-clean coated Design stripes: black	Plastic



- Can be operated with used water (rainwater) provided it is passed through a filter system first