

QUADRANT SINGLE LEVER TAP MATT BLACK

TQSL1MB/



The Quadrant kitchen tap collection features modern straight lines and a distinct square body designed to create a statement piece in any contemporary designed kitchen.

Within the Quadrant collection there are a choice of dual-lever, single-lever and monostem design lines, available in several finishes.

- Suitable for medium pressure water systems emitting a minimum pressure of 0.5 bar or above
- Featuring an anti-splash spout with honeycomb aerator design which mixes air with water to emit a water flow with no splash

RANGEmaster
sinks & taps

Overall Height (mm)	317
Spout Reach (mm)	219
Spout Height (mm)	297
Spout Rotation Range	360°
Handle Type	Single Lever
Colour	Matt Black
Bar Pressure Suitability	
Min. Bar Pressure	0.50
Max. Bar Pressure	5.50
Mixed Flow Rate at 3 Bar Pressure (l/min)	12.58
Flow Type	Single Flow
Recommended Hot Water Temperature	46°C
Maximum Hot Water Temperature	70°C
Handle Control	Half Turn
Centre Distance (mm)	-
Cartridge Type	Ceramic Disc Cartridge
Aerator Type	Honeycomb Aerator
Inlet Pipes	1/2" Stainless Flexible Hoses
Anti-Splash Spout	Yes
Pull Out Spray	No
WRAS Approved	No
Product Code	TQSL1MB/
Barcode	5015834051383


Date of download: July 19, 2023

AGA Rangemaster continuously seeks improvements in specification, design and production of products and thus, alterations take place periodically. Whilst every effort is made to produce up to date resources, the information included here is intended as a guide. Always refer to the installation instructions when fitting, installation work should be completed by a professional tradesman.

QUADRANT SINGLE LEVER TAP MATT BLACK

TQSL1MB/

Technical Drawing

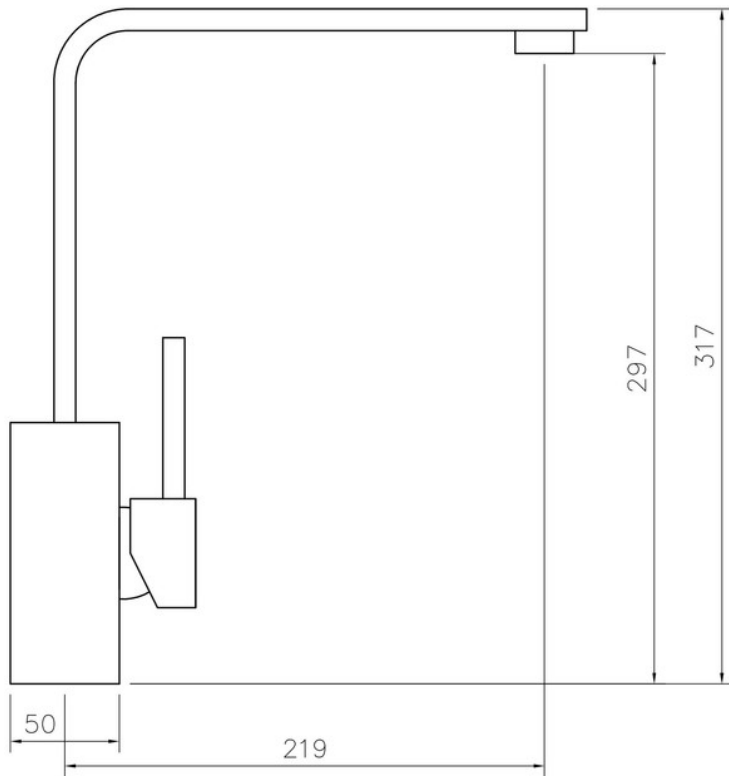

Date of download: July 19, 2023

AGA Rangemaster continuously seeks improvements in specification, design and production of products and thus, alterations take place periodically. Whilst every effort is made to produce up to date resources, the information included here is intended as a guide. Always refer to the installation instructions when fitting, installation work should be completed by a professional tradesman.